



NOTE:
SEE SITE PLAN FOR PIPE SIZE AND MATERIAL.
NOT FOR AREAS SUBJECT TO VEHICULAR TRAFFIC.


CLEANOUT DETAIL
NOT TO SCALE

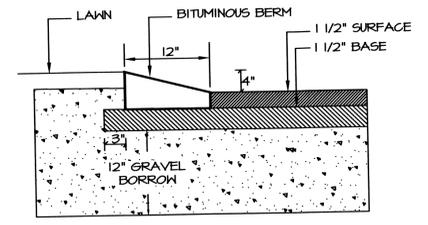


BITUMINOUS BERM DETAIL
NOT TO SCALE

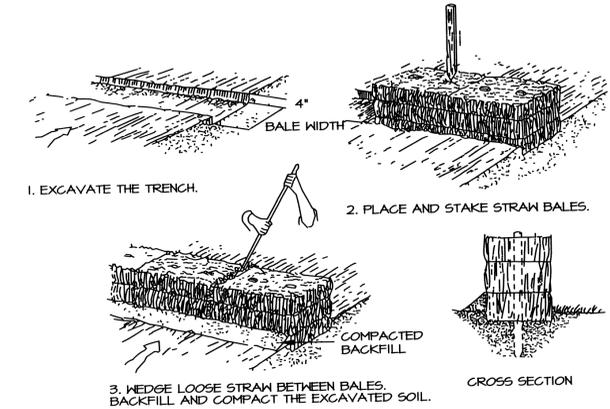

HAY BALE DETAIL
EROSION CONTROL DEVICE

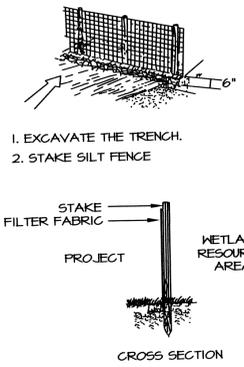


SILT FENCE DETAIL
EROSION CONTROL DEVICE

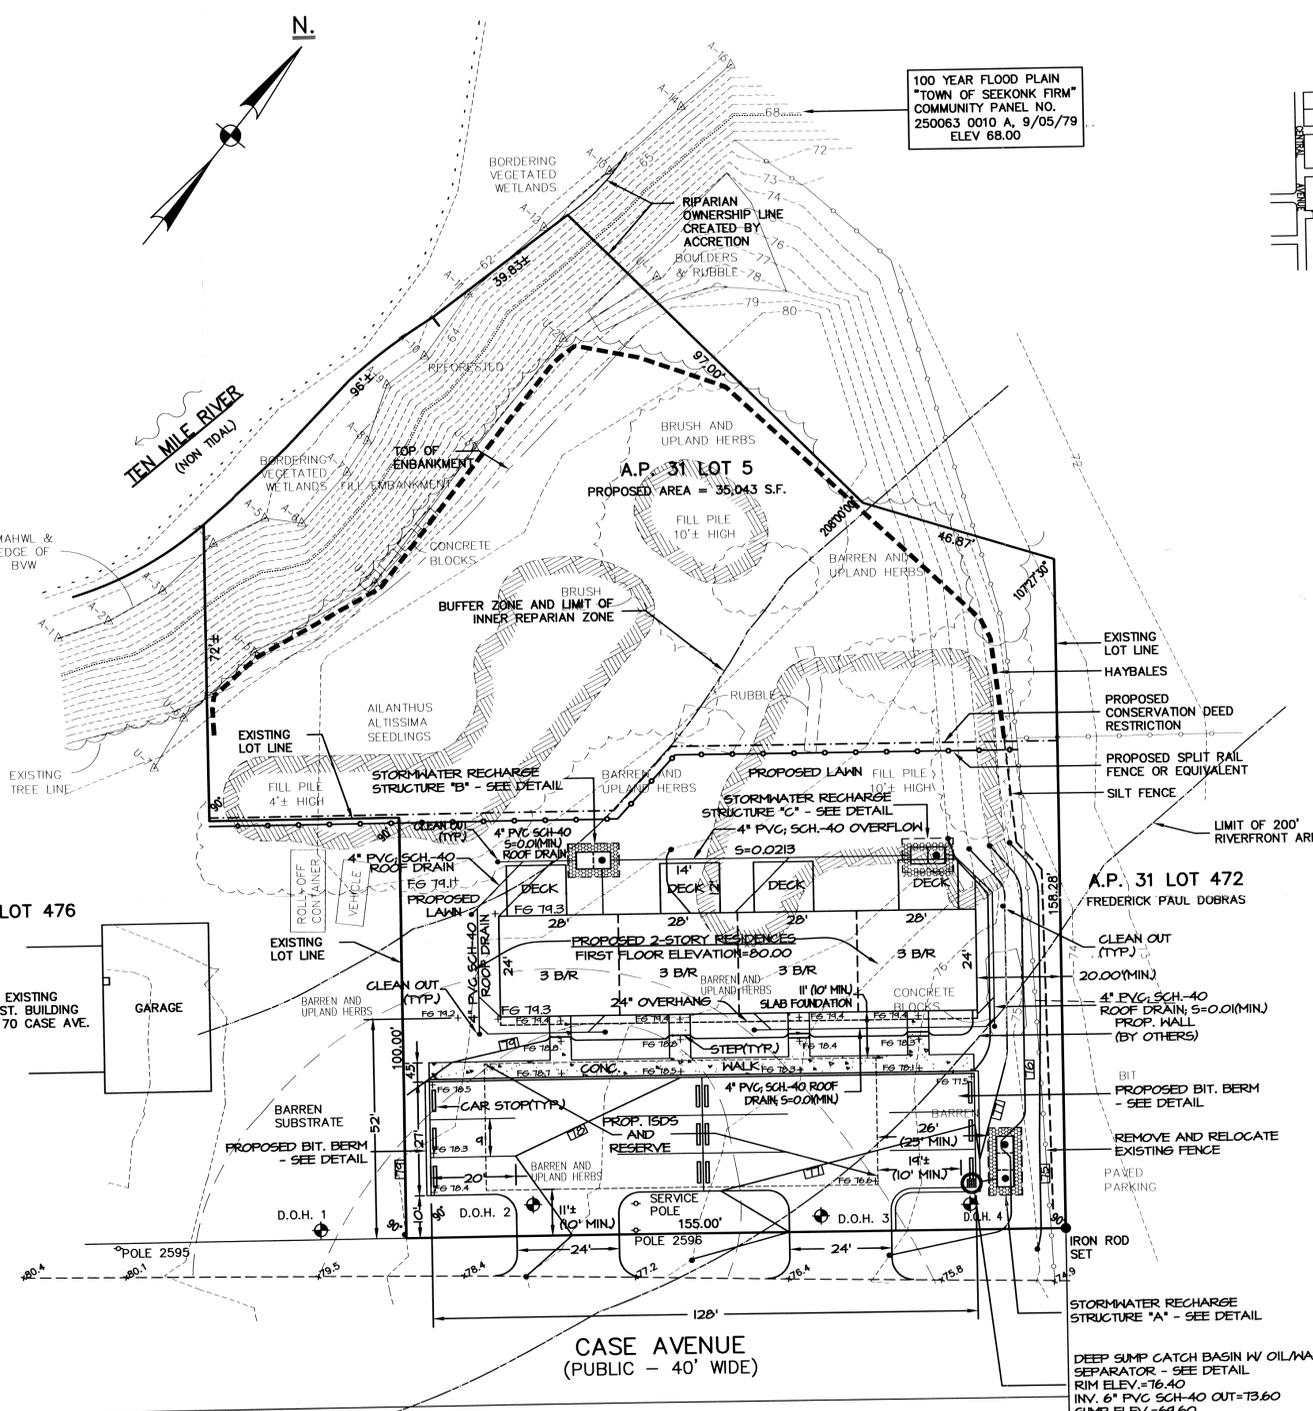

SITE PLAN
SCALE 1" = 20'

100 YEAR FLOOD PLAN
"TOWN OF SEEKONK FIRM"
COMMUNITY PANEL NO.
250063 0010 A, 9/05/79
ELEV 68.00



EROSION & SEDIMENTATION CONTROL

- 1) All perimeter erosion and sedimentation controls must be installed prior to the commencement of earthwork.
- 2) Accessible reserves of hay bales and stakes are to be maintained on site for routine maintenance and in the event of unanticipated problems requiring emergency response.
- 3) Hay bales should be installed in accordance with the details provided.
- 4) No work is to occur on the wetland side of the perimeter erosion and sedimentation controls. All perimeter controls serve as the project limit of disturbance.
- 5) No stones, brush, construction debris, litter, or other materials are to be deposited on the wetland side of the erosion and sedimentation controls.
- 6) All disturbed soils not designated for other surface treatment are to be loamed and seeded immediately following final grading.
- 7) Appropriate precautions should be taken to prevent the transport of soil offsite from construction equipment.
- 8) All perimeter erosion and sedimentation controls must be properly maintained and must remain in place until the soils have been stabilized to the satisfaction of the Engineer and the Seekonk Conservation Commission.

STORMWATER MAINTENANCE SCHEDULE


- 1) THE PARKING AREA SHOULD BE SHEET CLEAN ON A SEMI-ANNUAL BASIS TO REMOVE CONTAMINANTS AND SOIL FINES. IT IS PARTICULARLY IMPORTANT TO SCHEDULE SPRING SHEEPING TO REMOVE RESIDUAL SAND RESULTING FROM WINTER SNOW AND ICE REMOVAL OPERATIONS. THE PARKING AREA SHALL ALSO BE SHEET AT OTHER TIMES DURING THE YEAR AS NECESSARY.
- 2) INSPECT GATCH BASIN SEMI-ANNUALLY (SPRING AND LATE FALL/EARLY WINTER) AND REMOVE SEDIMENT, LEAVES AND DEBRIS AS NECESSARY. IT IS IMPORTANT THAT THE SUMPS BE PROPERLY MAINTAINED TO PREVENT DISCHARGE OF FINES INTO THE STORMWATER INFILTRATION SYSTEM.
- 3) INSPECT THE INFILTRATION SYSTEMS AND DRAIN PIPES ON AN ANNUAL BASIS, AND REMOVE ANY SEDIMENT, LEAVES AND DEBRIS. LATE SPRING OR EARLY SUMMER INSPECTION SCHEDULE IS CONSIDERED PREFERABLE.

GENERAL NOTES:

- 1) ALL WORK AND MATERIALS ARE TO CONFORM WITH MASSACHUSETTS HIGHWAY STANDARDS AND TOWN OF SEEKONK STANDARDS OR REQUIREMENTS.
- 2) UNDERGROUND UTILITY INFORMATION SHOWN ON THE DRAWINGS HAS BEEN PLOTTED FROM RECORD DATA AND MAY NOT BE CORRECT. PRIOR TO ANY EXCAVATION, CONTACT "DIG-SAFE" TO ESTABLISH MORE PRECISE LOCATIONS OF UTILITIES ON THE GROUND.
- 3) INSTALL 4 INCHES OF LOAM AND SEED IN ALL AREAS DISTURBED BY CONSTRUCTION THAT ARE NOT DESIGNATED FOR ANOTHER SURFACE TREATMENT.
- 4) INSTALL A 6" COMPACTED GRAVEL OR CRUSHED STONE BED UNDER ALL STRUCTURES AND A 6" SAND BED UNDER ALL PIPING.

LEGEND

100'	EXISTING CONTOUR
100'	PROPOSED CONTOUR
MA. STD.	MASSACHUSETTS STANDARD
INV.	INVERT OF PIPE
P. V. C.	POLYVINYL CHLORIDE PIPE
S. D. R.	STANDARD DIMENSION RATIO
R. C. P.	REINFORCED CONCRETE PIPE
CONC.	CONCRETE (BIT. OR P. C.)
BIT.	BITUMINOUS
P. C.	PORTLAND CEMENT
TYP.	TYPICAL
+F.S. 100.0	FINISHED SPOT GRADE
x100.0	EXISTING SPOT GRADE
P	PROPERTY LINE
-X-CLF-X-	CHAIN LINK FENCE
⊙	DEEP OBSERVATION HOLE



4-UNIT RESIDENTIAL BUILDING
PREPARED FOR
GARY S. SAGAR
CASE AVENUE
SEEKONK, MASSACHUSETTS
CAPUTO AND WICK LTD. DATE: NOVEMBER 27, 2002
1150 PAWTUCKET AVE. SHEET: 2 OF 4
RUMFORD, R.I. 02916
401-434-8880

Received
FEB 02 2005
Con. Comm.

69-510

REVISED 1/26/05